

MASON CONTRACTORS

WE NOW STOCK SELECT **SPEC MIX**® PRODUCTS FOR EASY DELIVERY TO YOUR PROJECTS



CORE FILL GROUT

Available in both **Fine** and **Coarse** designs to meet various project specifications.

The Core Fill Grouts are dry, preblended, containing cementitious and dried aggregate materials. Just add water!

Formulated for superior flow to fill masonry voids and achieve required compressive strength, while meeting ASTM C 476 and CSA A179 requirements for reinforced masonry construction.



MASONRY CEMENT & SAND MORTAR (M, S, N)

A dry preblended mortar mix containing masonry cement and dried masonry sand. Just add water!

It is engineered for the installation of CMU and brick applications, and is available in Types M, S and N, and each designation meets ASTM C 270, ASTM C 1714, and CSA A179 requirements.

Available in standard or custom colors. Don't need preblended colored mortar? Our WORKRITE colored cements are always available.



PORTLAND LIME & SAND MORTAR

A dry preblended mortar mix containing portland cement, hydrated lime and dried masonry sand. Just add water! Available in Types M, S and N, each meets ASTM C 270, ASTM C 1714 and CSA A179 requirements.

Available in standard or custom colors. Don't need preblended colored mortar? Our WORKRITE colored cements are always available.



See standard colors on reverse.

DON'T FORGET TO ADD SPEC MIX TO YOUR NEXT ORDER.

One-stop shopping: Add pallets of SPEC MIX to your block order... it ships with your block!


Comes in 80lb. bags (42 bags/pallet). Full pallet qtys only.

Stocked at our New Holland, Middletown, and Loucks Mill locations. Coming soon to our Cockeysville, MD location.



Product data sheets available for free download at yorkbuilding.com

COLOR PALETTE

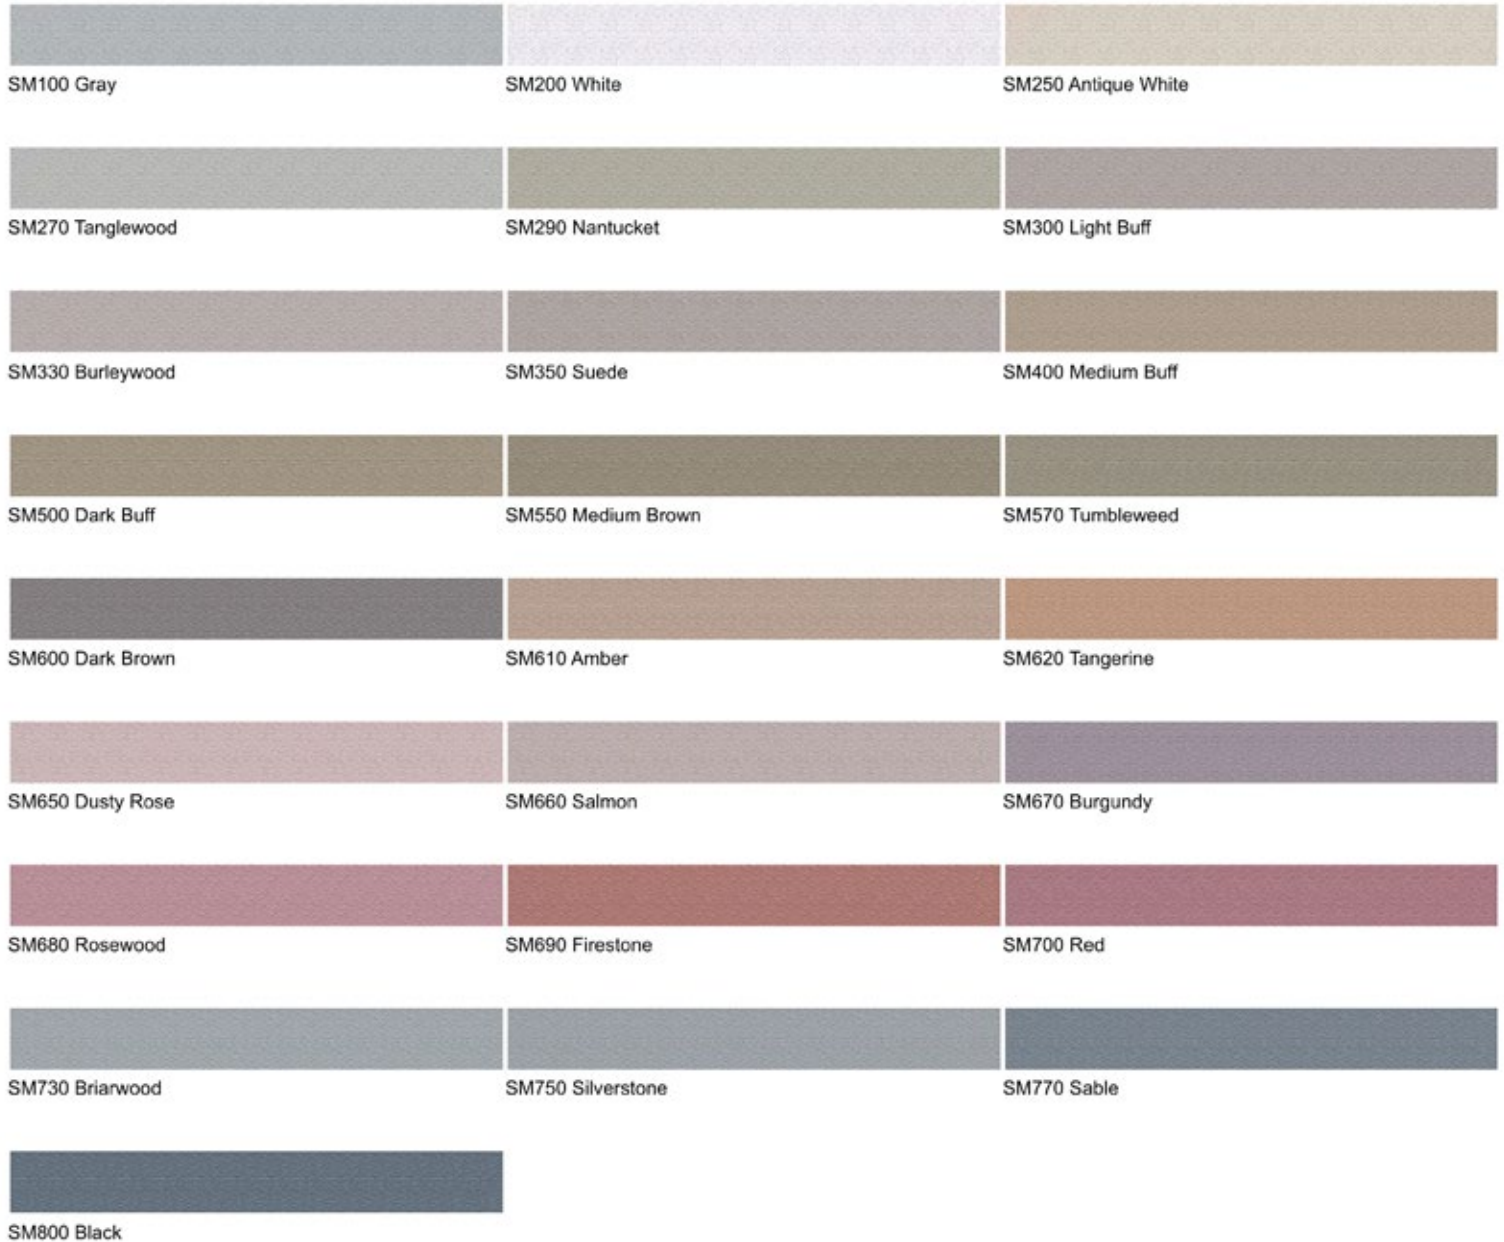

IMPORTANT NOTE:

The sample colors shown in color charts or channel kits are provided to demonstrate the colors available. THE SAMPLE COLORS ARE ONLY APPROXIMATE. Variation in color, shades of color, texture, and aggregate exposure is inherent in all masonry mortars and exact matches cannot be guaranteed. Actual shade and texture will depend on job site conditions, lighting, mixing and installation techniques and types of masonry units used, and may vary from color charts or color channel kits. It is recommended that a sample panel is constructed using all representative materials and allowed to fully cure. The panel should be washed and approved prior to construction.